



WF111 Wi-Fi® Module

Table of Contents

- Key Features
- Benefits
- WF111 Overview
- WF111 Operating System drivers
- Certifications
- Development Tools



Key Features



- **IEEE 802.11 b/g/n radio**
 - Single 2.4 GHz band
 - Symbol rate up to 72.2Mbps
- **Integrated antenna or U.FL connector**
- **Supports WEP, WPA and WPA2 encryption modes**
- **Software Access Point mode up to 8 clients**
- **Advanced *Bluetooth* co-existence support**
- **Temperature range: -40°C - +85°C**
- **SDIO host interface**
- **CE, FCC and IC, Japan and South-Korea qualified**
- **Linux and Android operating system drivers for ARM, x86 and PowerPC processors**
- **Small size: 12.0 x 19.0 x 2.1 mm**

Benefits

- Small, fully integrated 802.11 b/g/n module with radio and antenna
- Low power solution designed for mobile and battery power applications
- Industrial specifications, long life time and future proof solution
- Regulatory qualifications reducing R&D risk and time-to-market



WF111 Overview



- **Single stream 802.11 b/g/n radio**
 - Frequency: 2402 – 2480 MHz
 - TX power: +17 dBm
 - RX sensitivity: -91 dBm
 - Symbol rate: up to 72.2 Mbps
- **Symbol rates**
 - 802.11n: 72.2 – 6.5 Mbps
 - 802.11g: 54 – 6 Mbps
 - 802.11b: 11 – 1 Mbps
- **Channels**
 - North America 11 channels
 - Rest of the world: 13 channels
- **Quality of service**
 - WMM
 - WMM power save
 - 802.11e
- **Line-of-sight range**
 - Up to 500 meters

WF111 Overview



Host interfaces

- SDIO
- SPI

Radio co-existence interfaces

- 3-wire Unity 3
- 3-wire Unity 3e+ (recommended)
- 4-wire Unity 4

Programming & Debug

- 802.11 debug SPI

Configurable GPIO ports

- 6 configurable IO ports (wake-up, sleep etc.)

WF111 Overview



Power supply:

- **Only two voltages needed**
 - 1.8V and 3.3V
- **VDD_REGIN : 802.11 core voltage**
 - 1.45 - 2.0V
- **VDD_PA : Front-end power supply**
 - 2.7 - 4.8V
- **VDD_IO / SDIO : Digital lines**
 - 1.7 - 3.6V
 - Supports both 1.8V or 3.3V voltage levels

WF111 Overview



Current consumption at 3.3V

- **TX peak**
 - 248 mA
- **RX peak**
 - 240 mA
- **Typical TX consumption**

– 802.11n @ 12Mbps	144 mA
– 802.11g @ 1 Mbps	78 mA
– 802.11b @ 1 Mbps	94 mA
- **Typical RX consumption**


– 802.11n @ 16.5 Mbps	88 mA
– 802.11n @ 1 Mbps	70 mA
- **Idle, associated to an Access Point**
 - 1.7 mA
- **Deep sleep**
 - 110 uA



WF111 Operating System Drivers

WF111 Operating System Drivers

- **WF111 only contains the 802.11 radio and lower 802.11 MAC**
 - Upper 802.11 MAC needs to be on a separate host
 - IP stack needs to be on a separate host
 - The application needs to be on a separate host
- **Bluegiga provides Linux and Andorid drivers of WF111**
 - Support SDIO interface
 - Contains 802.11 MAC stack
 - Interfaces to standard Linux wireless tools like **wpa_supplicant**
 - Source code availability (contact sales@bluegiga.com)
- **Supported processor architectures**
 - ARM
 - x86
 - PowerPC
- **Supported OS versions**
 - Linux kernels 2.6 to 3.2
 - Android 2.3.x

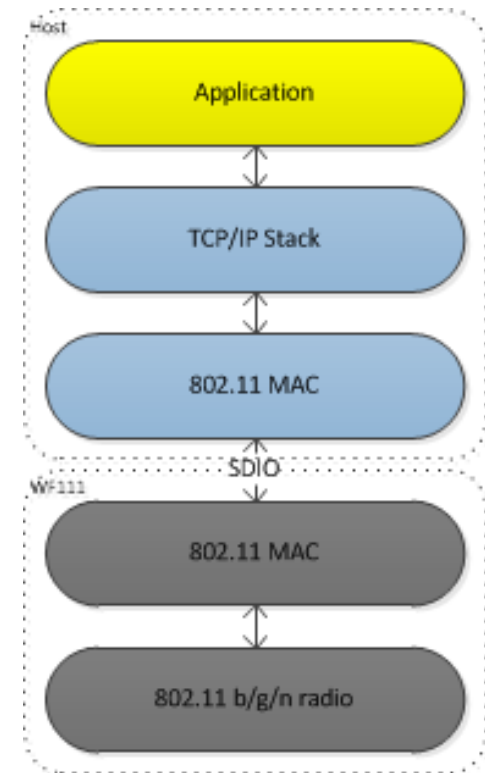


Certifications



- **Wi-Fi certification**
 - Tested to comply Wi-Fi certification
 - Wi-Fi Alliance requires end products to be separately certified
- **CE**
 - EN300328
 - EN301489-1/17
 - EN60950-1
- **FCC**
 - Part 15C modular approval
- **Industry Canada**
 - IC modular certification
- **South Korea**
 - KCC certification
- **Japan**
 - ARIB-STD-66



Development Tools

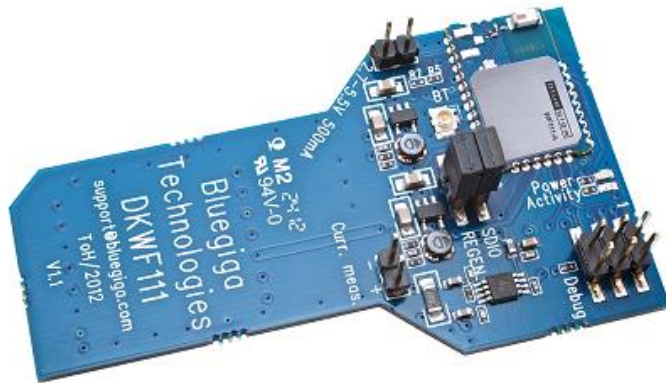

- **WF111 Development Kit**
 - WF111-A
 - SDIO connector board
 - SPI debug interface
 - Activity led
 - Current measurement point
 - + Linux and Android drivers
 - + Debug cable
 - + Documentation



Thank You

