

WELCOME



Silicon Labs LIVE:

Wireless Connectivity Tech Talks

Tech Talks LIVE Schedule

Topic	Date
Bluetooth AoX Solutions	Thursday, April 2
15.4 Mesh Networking Technologies	Tuesday, April 7
Bluetooth Mesh Solutions & Tools	Thursday, April 9
Device & Network Security for the IoT	Tuesday, April 14
Evolution of Bluetooth 5, 5.1, & 5.2	Thursday, April 16
Future-proofing your design for Project Connected Home over IP	Tuesday, April 21

https://www.silabs.com/support/training



Futureproofing your Design for Project Connected Home Over IP

APRIL 2020

IoT Market Opportunity & Challenges





What Does the IoT Market Need to Grow?

Market expectations:


 Simple – Simplicity for end customers, developers and manufacturers

 Secure – Robust security from end devices to the cloud is essential

■ Inclusive and Open — Products to work together and across ecosystems



Project Connected Home Over IP - Introduction

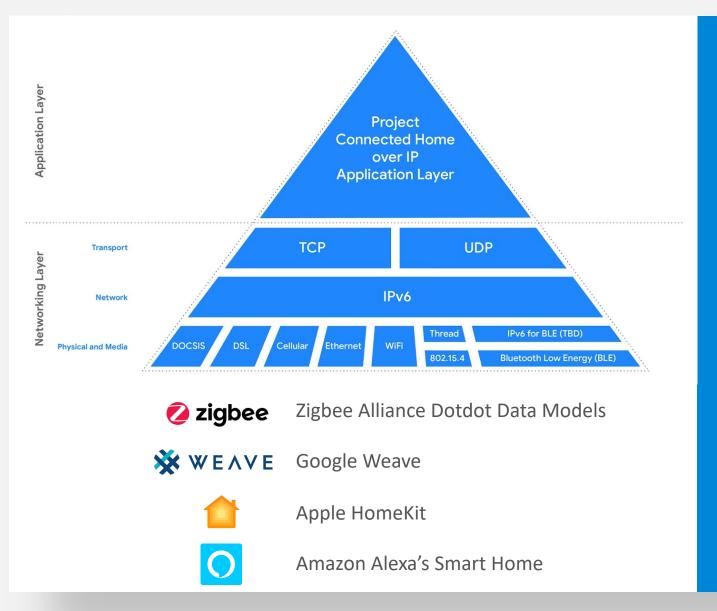

- Project Connected Home over IP is a Working Group within the Zigbee Alliance that plans to develop and promote the adoption of a new, royalty-free connectivity standard to increase compatibility among smart home products, with security as a fundamental design tenet.
- Amazon, Apple, Google, and the Zigbee Alliance joined together to promote the formation of the Working Group. Silicon Labs is fully endorsing this project and actively engaged
- Goals
 - Simplify development for manufacturers and increase compatibility for consumers
 - Enable communication across smart home devices, mobile apps, and cloud services

Connected Home Over IP – Participating Companies

https://www.connectedhomeip.com


































Note: More than 90 Companies joined the project since announcement

Project Connected Home Over IP – Key Takeaways

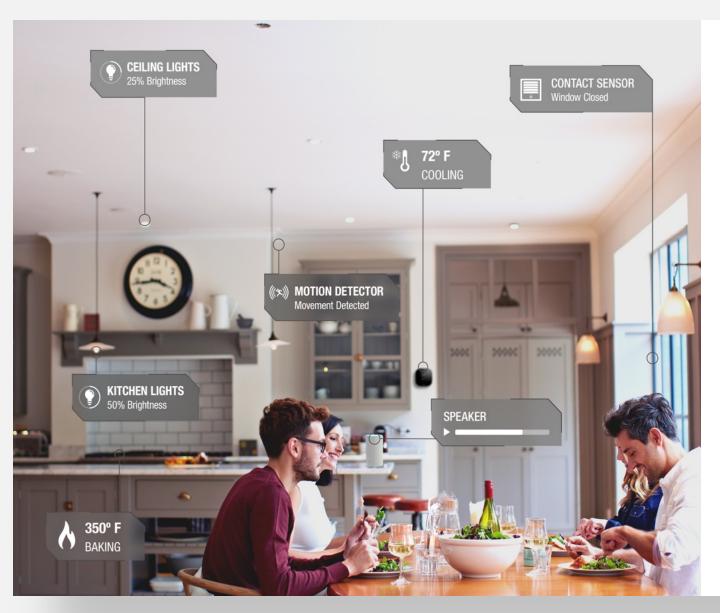

- New application layer based on market-tested technologies running on multiple network protocols like Wi-Fi, Bluetooth and 802.15.4
- Aims to improve customer experience by creating a protocol widely adopted across ecosystems and assistants
- Initial emphasis in the Smart Home which could be later expanded to other applications areas
- Removes barriers for Smart Home Ecosystems
 Providers and IoT Product Manufacturers
- Rapid pace development based on open source

Futureproof Your Design and Start Building Products Today



• Question:

I'm developing new products today. How does the Project affect my development path?

Answer:

- The new application protocol will complement existing technologies
- Start building products today using existing technologies like Zigbee or Thread
- Update your product in the future using secure over the air updates
- Use larger memory variant ICs and Modules since memory requirements are not fully defined today
- Join project <u>Connected Home Over IP</u> in <u>Zigbee</u> <u>Alliance</u>

IoT Security legislation is happening



Already accounts for ~30% US population

- California Consumer Privacy Act (§ SB-327)
 - Approved Sept 28th, 2018
 - Effective Jan 1st, 2020
- Requires 'reasonable security features'
 - appropriate to the nature and function of the device
 - appropriate to the information it may collect, contain, or transmit
 - designed to protect the device and any information contained therein from unauthorized access, destruction, use, modification, or disclosure
- Multiple US states have already introduced other bills that resemble California's example

European Regulation

- European Standard EN 303 645
- Technical Specification TS 103 645
- Cyber Security for Consumer Internet of Things
 - No universal default passwords
 - Securely store credentials and security-sensitive data
 - Implement a means to manage reports of vulnerabilities
 - Keep software updated
 - Communicate securely
 - Minimize exposed attack surfaces
 - Ensure software integrity
 - Ensure that personal data is protected
 - Make it easy for consumers to delete personal data
 - Make installation and maintenance of devices easy
 - Etc...

Why Silicon Labs?

COMPREHENSIVE WIRELESS PORTFOLIO







- 80+ active OPNs for ICs and Modules
- +20dBm PA and best in class RF sensitivity
- Low power, Secure Element, Vault™
- Innovative SiP technology for modules

EXTENSIVE EXPERIENCE IN MESH NETWORKS


zigbee THREAD Bluetooth





- Zigbee/Thread BoD seats and WG Chairs
- Main Zigbee/Thread spec developers
- Leading Bluetooth Mesh implementers
- Z-Wave Alliance and specification drivers

PROVEN COEXISTENCE WITH OTHER SHORT-RANGE RF



- Flexible PTA Interface for managed CoEX
- Multi-vendor Wi-Fi support
- Application optimized performance
- Best in class unmanaged coexistence

MULTIPROTOCOL SUPPORT




- Run simultaneously multiple protocols
- Increase functionality by adding BLE
- Lower product cost, lower design cost
- Proven customer products available today

PLATFORM SCALABILITY FOR SW AND SECURITY

		Host E	nvironmen				olchains		Other			
Energy Profiler Hardware Config App Builder		ilder	IAR		Sample Apps	Precertification		Community & Support				
			Secure Programming		GCC	MISRA, Large Networ Static Analysis Testing		ork	rk App Notes & Documentation			
SEMI	COND	исто	R PROVID	ED	C	USTO	MER IMPL	EMENTED		Oth	er	
OBletoni Drotter THREAD () Sighter Court			Comme	1	P B Man & work			Coexistence		BR / Gateway		
			Ra	dio Abstra	ction La	ıyer			Multiproto	col	Tes	t Harness
RTOS		C	ore Platforr	n	Dri	vers	Security	Utilities	P.	Middle	ware	
KAL	Sle	ер	IPC	Memory	PO	SIX	Security Libraries	C-Lib, Diag, Stats,			FS, IO NCP, CLI C	
Kernel	Tim	ers	Events	System	CN	tsis	Secure Element	Error Codes, Assert	Bootloader	NV	м	Graphics Li
		-	oT SoC				Mod	fules	Devel	lopme	nt Bo	ards
			JI 30C		Crypto HW, PUF, DPA , Key Storage				Starter Kits		Reference Designs	
Secure M	icu	Mul	ti-Protocol Radio			Ante	nna & Match	Certifications	Starter Kit	ts	Refer	ence Design

- Same software components and drivers for each wireless stack
- Easy migration across hardware portfolio
- Faster time to market

BEST IN CLASS MESH STACKS



- 500+ nodes test network for SQA
- Large network performance benchmarks
- Interoperability testing for each release
- Comprehensive RF performance testing

ESSENTIAL TOOLS



- Packet Trace Interface (PTI)
- Timestamp synchronized Network Analyzer
- Energy Profiler for battery life calculations
- App builder for easy project configuration

TRUSTED ECOSYSTEM PARTNER



- Trusted by leading platforms
- Deep ecosystem relationships
- Leading Market Share
- Over 250M 802.15.4 devices shipped

Silicon - Labs Mesh Networks Portfolio


	Bluetooth		Bluetooth ®		Bluetooth ®		THREAD	2 zigbee	WAVE	Proprietary	
Customer Application Application GATT Mesh Models (e.g. lighting)		Customer Application	Customer Application	Customer Application							
		Application Layer (e.g. OpenWeave, CoAP, OCF, etc.)	Application Profile (ZCL)	Application Profile (Device Class)	Customer Application						
Network / Transport	Bluetooth Bluetooth LE Core Mesh Core		OpenThread	Zigbee Compliant Platform Stack	Z-Wave Network Layer	Connect Stack	Customer Proprietary				
Link	Bluetooth Link Layer		IEEE 802.15.4 MAC	IEEE 802.15.4 MAC	ITU-T G.9959 MAC	IEEE 802.15.4 like MAC	Stack				
Physical	Bluetooth PHY IEEE 802.15.4 PHY (2.4 GHz) (2.4 GHz)			IEEE 802.15.4 PHY (2.4 GHz)	ITU-T G.9959 PHY (Sub-GHz)	Proprietary PHY (2.4 GHz or Sub-GHz)					
	RAIL										
Platform	Common Platform Drivers, Middleware & Bootloader										

Silicon Labs OpenThread Roadmap



- OpenThread Support
 - GitHub: EFR32MG12, EFR32MG13, EFR32MG21
 - Gecko SDK & Simplicity Studio integration (Jun 2020)
- OpenWeave GitHub Door Lock Sample App
 - Control via Thread and BLE
 - Easily integrate into Google ecosystem
- Dynamic Multi-Protocol (DMP) Thread and Bluetooth
 - Develop devices that work simultaneously over BLE and Thread

- Certification (MG12, MG13, MG21)
 - Thread 1.1 certification on EFR32 running OpenThread
- NCP & RCP Support
 - Develop a border router application using a Raspberry Pi
 - Functional with the Thread commissioning app
- Wi-Fi Coexistence (Roadmap)
 - Managed coexistence with PTA interface
 - Un-managed coexistence with great blocking performance

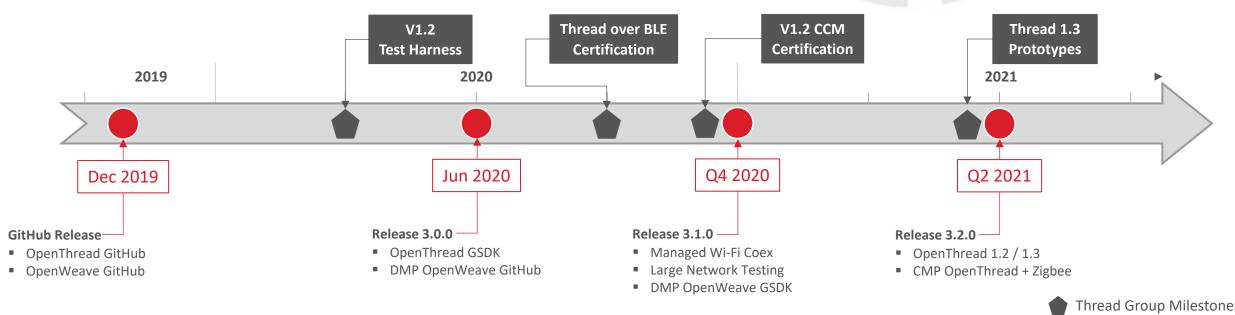

Silicon Labs Zigbee 3.0 (EmberZNet) Roadmap



Dynamic Multiprotocol Zigbee and Bluetooth

- Develop devices that work simultaneously over BLE and Zigbee
- Fully integrated GATT configurator

Zigbee Green Power (GPD, Sink, GPPB)

- Proxy functionality required for Zigbee 3.0
- Expand energy savings of Zigbee Pro by 5x

Works With All Hubs

- Easily integrate into Amazon ecosystem
- Test harness provided by Silicon Labs running on EFR32

Friends of Hue

- Easily integrate into Philips Hue ecosystem
- Sample applications for battery powered switches

Low Power Support


EM2 & EM4 to support long-lasting battery powered sensors

Wi-Fi Coexistence

- Managed coexistence with PTA interface
- Un-managed coexistence with great blocking performance

Upcoming Zigbee R23 (Roadmap)

Improved security and commissioning

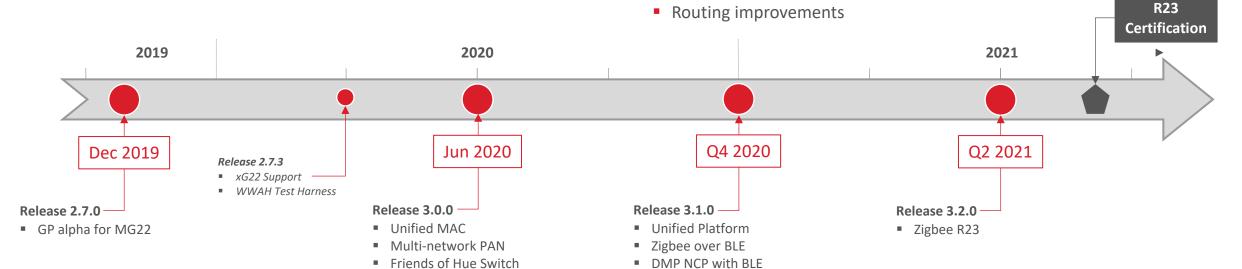

Mesh SoC Portfolio Highlights

	Series 1 - MG12	Series 2 – MG21				
Target applications	Mesh Routers and End Devices	Mesh Routers and End Devices				
Availability	Now	Now				
Protocols features	Zigbee 3.0, Green Power, OpenThread, OpenWeave, Bluetooth LE, Bluetooth Mesh Multiprotocol (Zigbee/OpenThread/BLE)					
Proprietary 2.4G	Proprietary 2.4G 2/4(G)FSK, OQPSK/(G)MSK, DSSS, BPSK/DBPSK TX, OOK/ASK N/A					
TX / RX (802.15.4)	+19 dBm / -102.7 dBm	+20 dBm / -104.5 dBm				
TX Current	9.5 mA (@ 0 dBm)	9.3 mA (@ 0 dBm)				
RX Current (802.15.4)	11.9 mA	9.4 mA				
CPU / Clock Speed	Cortex M4 (38.4 MHz)	Cortex M33 (80Mhz)				
Flash (kB)	1024	Up to 1024				
RAM (kB)	256	Up to 96				
Sleep Current (EM2)	1.3μA (16kB RAM)	4.5 μA (96 RAM)				
Active Current (EM0)	70 μA/MHz	51 μA/MHz				
Security	2x AES-128/256, ECC, SHA-1/224/256, TRNG	AES-128/256, SHA-1/2, ECC, ECDSA and TRNG DPA countermeasures Secure boot with RTSL Secure OTA and secure debug unlock + Secure Enclave (MG21B)				
Operating Voltage	1.8V – 3.6V	1.71V – 3.8V				
Packages (mm) 7x7 QFN48 4x4 QFN32						

Note:

- Project Connected Home Over IP Memory requirements and exact configurations are not fully defined today
- For more information join project

 <u>Connected Home Over IP</u> in <u>Zigbee Alliance</u>

Mesh Module Portfolio







	MGM12P	MGM210P	MGM210L		
Protocols	Bluetooth 5.0 & mesh Zigbee or Thread	Bluetooth 5.1 & mesh Zigbee or Thread	Bluetooth 5.1 & mesh Zigbee or Thread		
Status	Production	Production	Production		
EFR32 SoC	xG12	xG21	xG21		
Antenna	Chip or U.FL	Chip or RF pin	PCB trace antenna		
Max TX power	+8 / +19 dBm	+10 / +20 dBm	+12.5 dBm		
(250 kbps O-QPSK)	-95 dBm	-104.5 dBm	-104.5 dBm		
TX (125 kbps GFSK)	N/A	-105 dBm	-105 dBm		
(1Mbps GFSK)	-95 dBm	-97 dBm	-97 dBm		
Flash / RAM	1024 / 256 kB	1024 / 96 kB	1024 / 96 kB		
GPIO	25	20	12		
Operating Voltage	1.8 to 3.6 V	1.71 to 3.8 V	1.8 to 3.8 V		
Operating Temperature	-40°C to +85°C	-40°C to +125°C	-40°C to +125°C		
Dimensions W x L x H (mm)	12.9 x 15 x 2.2	12.9 x 15 x 2.2	15.5 x 22.5 x 2.3		
Certifications	BT, CE, FCC, ISED, Japan, S-Korea and Taiwan	BT, CE, FCC, ISED, Japan & S-Korea	BT, CE, FCC, ISED, Japan & S-Korea		
Other	Options with LNA available	No LF XTAL	No LF XTAL		

Note:

- Project Connected Home Over IP Memory requirements and exact configurations are not fully defined today
- For more information join project
 Connected Home Over IP in Zigbee Alliance

Key Takeaways to Futureproof for the Project

Choose a larger memory variant part

You can OTA to support Connected Home Over IP


Start your development with Zigbee or OpenThread

Incorporate the required security features into your product

18 Silicon Labs Confidential



Thank You | Questions

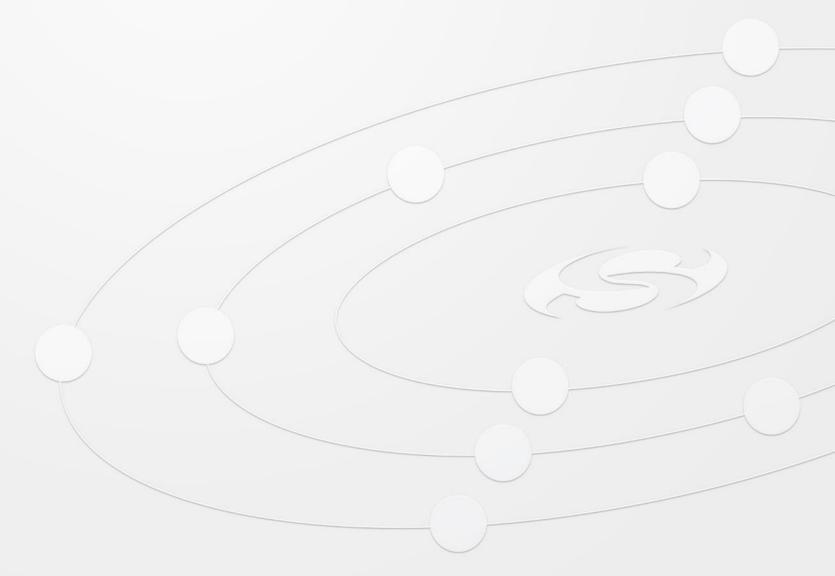

NEW SESSIONS! Tech Talks LIVE Schedule

Topic	Date
Z-Wave Overview	Thursday, April 23
Battery Optimization with BG22	Tuesday, April 28
Max Performance on BLE – Simultaneous Connections, Beacons and Scanning	Thursday, April 30
SubGHz proprietary and Connect software stack	Tuesday, May 5
How to measure and debug network performance - Using Silicon Labs network analyzer	Thursday, May 7

https://www.silabs.com/support/training