



170817142 EFR32MG13, EFR32BG13 & EFR32FG13 Revision C and Data Sheet Revision 1.0

PRCN Issue Date: 8/17/2017

Effective Date: 11/23/2017

PCN Type: Datasheet; Product Revision

Description of Change

Silicon Labs is pleased to announce hardware revision C for the EFR32MG13 Mighty Gecko Multi-Protocol, EFR32BG13 Blue Gecko Bluetooth® Low Energy and EFR32FG13 Flex Gecko Proprietary Wireless SoC families. All Rev C OPNs have achieved Full Production (FP). Datasheets and errata have been updated for these products. The new revision is a pin-compatible replacement for the previous revision B devices.

The datasheets are updated to version 1.0. Notable changes from Revision 0.5 are:

- Updated specification tables with latest characterization values and production test min/max limits
- Added high-temperature OPNs and associated specifications
- Corrected Typical Sub-GHz Impedance-matching network circuits Figure
- Updated Sensitivity in Table 4.15 (RF Receiver characteristics for Bluetooth Low Energy in the 2.4 GHz Band, 1 Mbps Data Rate) to reflect new PHY configuration that fixes Interoperability issues identified with previous PHY configuration

The Errata is updated to Revision 0.3. Revision C eliminated the following errata in revision B:

ADC_E224: ADC Warm-Up Ready Can Cause IDAC, ACMP, or CSEN to Not Function

ADC_E225: Using the ADC in High Accuracy Bias Mode Will Force All Analog Peripherals to High Accuracy Bias Mode

RMU_E203: AVDD Ramp Issue

Additionally, the following new Errata has been added since the previous revision of the document:

PLFRCO_E201: Output Frequency Error Below 0 °C Causing Bluetooth Communication

Issues

After the effective date of this PCN, Silicon Labs reserves the right to deliver product revision C for customers ordering product revision B.

Reason for Change

See Above.

Impact on Form, Fit, Function, Quality, Reliability

The new revision is a pin compatible replacement for the previous revision B devices. There have been no changes to device pin-out (fit), functionality quality or reliability.

Product Identification

Existing Part #	Replacement Part #	DropInCompInd.
EFR32BG13P532F512GM48-B	EFR32BG13P532F512GM48-C	Yes
EFR32BG13P532F512GM48-BR	EFR32BG13P532F512GM48-CR	Yes
EFR32BG13P632F512GM48-B	EFR32BG13P632F512GM48-C	Yes
EFR32BG13P632F512GM48-BR	EFR32BG13P632F512GM48-CR	Yes
EFR32BG13P733F512GM48-B	EFR32BG13P733F512GM48-C	Yes
EFR32BG13P733F512GM48-BR	EFR32BG13P733F512GM48-CR	Yes
EFR32BG13P732F512GM48-B	EFR32BG13P732F512GM48-C	Yes
EFR32BG13P732F512GM48-BR	EFR32BG13P732F512GM48-CR	Yes
EFR32FG13P233F512GM48-B	EFR32FG13P233F512GM48-C	Yes
EFR32FG13P233F512GM48-BR	EFR32FG13P233F512GM48-CR	Yes
EFR32FG13P232F512GM48-B	EFR32FG13P232F512GM48-C	Yes

EFR32FG13P232F512GM48-BR	EFR32FG13P232F512GM48-CR	Yes
EFR32FG13P231F512GM48-B	EFR32FG13P231F512GM48-C	Yes
EFR32FG13P231F512GM48-BR	EFR32FG13P231F512GM48-CR	Yes
EFR32MG13P632F512GM48-B	EFR32MG13P632F512GM48-C	Yes
EFR32MG13P632F512GM48-BR	EFR32MG13P632F512GM48-CR	Yes
EFR32MG13P733F512GM48-B	EFR32MG13P733F512GM48-C	Yes
EFR32MG13P733F512GM48-BR	EFR32MG13P733F512GM48-CR	Yes
EFR32MG13P732F512GM48-B	EFR32MG13P732F512GM48-C	Yes
EFR32MG13P732F512GM48-BR	EFR32MG13P732F512GM48-CR	Yes

Last Date of Unchanged Product: 11/23/2017

Qualification Samples

Samples Available upon request.

Specific conditions of acceptance of this change will be considered on a case by case basis if written notice is submitted within 30 days of this notice. To request further data or inquire about this notification, please contact your local Silicon Labs sales representative. A list of Silicon Labs sales representatives is available at <http://www.silabs.com>.

In some cases rejection of a change notice may impact Silicon Labs product pricing, delivery, quality, or reliability.

Customer Early Acceptance Sign Off

Customers may approve early PCN acceptance by completing the information below:

Early Acceptance:

Date: _____

Name: _____

Company: _____

Email your early Acceptance approval to: PCNEarlyAcceptance@silabs.com

User Registration

Register today to create your account on [Silabs.com](http://www.silabs.com). Your personalized profile allows you to receive technical document updates, new product announcements, "how-to" and design documents, product change notices (PCN) and other valuable content available only to registered users. <http://www.silabs.com/profile>

Qualification Data

Please see attached Qualification Report in the Appendix.

EFR32xG13 RevC 48QFN Qualification Report



Part Rev B, TSMC Fabrication, SPIL Assembly							
Test Name	Test Condition	Qualification	Lot ID or Start	Fail/Pass or End	Notes	Summary	Status
Test Group A – Accelerated Environment Stress Tests - QFN							
HAST	JA110 130°C, 85%RH Vcc=3.8V, 96 hours	3 lots, N=>25	Q039879	1/30	1, 5		
			Q040220	0/30	1	4 lots	Pass
			Q039877	0/30	1		
			Q039878	0/30	1	1/120	
UHA	JA118 130°C, 85%RH 96 hours	3 lots, N=>25	Q039876	0/30	1		
			Q039875	0/30	1	3 lots	Pass
			Q039874	0/30	1	0/90	
Temp Cycle	JA104 Cond C: -65°C to 150°C 500 cycles	3 lots, N=>25	Q039882	0/30	1		
			Q039881	0/30	1	3 lots	Pass
			Q039880	0/30	1	0/90	
HTSL	JA103 150°C, 1000hr	3 lots, N=>25	Q038038	0/28	1		
			Q038124	0/28	1	3 lots	Pass
			Q037590	0/25	1	0/81	
Test Group B – Accelerated Lifetime Simulation Tests							
HTOL	JA108 T _J ≥ 125°C, Dynamic Vcc=3.8V, 1000 hours	3 lots, N=>77	Q040470	0/55			
			Q040650	0/79			
			Q040471	0/80		4 lots	Pass
			Q041124	0/80		0/294	
LTOL	JA108 T _A = -10°C, Dynamic Vcc=3.8V, 1000 hours	1 lot, N=>32	Q040451	0/80		1 lots 0/80	Pass
ELFR	JA108 T _J ≥ 125°C, Dynamic Vcc=3.8V, 48 hours	3 lots, N=>500	Q040472	0/516			
			Q040651	0/515		3 lots	Pass
			Q040450	0/505		0/1536	
NVM Endurance, Retention and Operating Life	JESD22-A117 25°C 500 hours	3 lots, N=>39	Q040213	0/40	6		
			Q040274	0/40	6	3 lots	
			Q040278	0/40	6	0/120	Pass
NVM Endurance, Retention and Operating Life	JESD22-A117 125°C 1000 hours	3 lots, N=>39	Q040279	0/40	7		
			Q040275	0/40	7	3 lots	
			Q040214	0/40	7	0/120	Pass
Test Group E – Electrical Verification							
ESD-HBM	JS-001	1 lot, N=>3	Q040909			2.5 kV	Class 2
ESD-CDM	JS-002	1 lot, N=>3	Q041561		2	500 V	Class C2a
			Q041575		3	1000 V	Class C3
			Q041580		4	500 V	Class C2a
Latch Up	JESD78 ±100mA Overvoltage = 6V	1 lot, N=>3	Q040907 Q040908	25 °C 125 °C			Pass

Approved by: K. Torres

1 of 2

Prepared on: 03-Aug-2017

EFR32xG13 RevC 48QFN Qualification Report




Part Rev B, TSMC Fabrication, SPIL Assembly							
Test Name	Test Condition	Qualification	Lot ID or Start	Fail/Pass or End	Notes	Summary	Status

Notes:

1. Parts are Pre-conditioned at MSL2/260°C
2. Dual-band bondout option
3. Sub GHz bondout option
4. 2.4 GHz bondout option
5. Failure analysis on the failure was inconclusive. An additional 30 units were stressed from the same assembly lot (Q040220) to reduce the LTPD% below the requirement. JEDEC sample size requirement of 25 units per lot has LTPD% = 9.21 at 90% confidence with 0 fails. With larger sample size = 60, LTPD% = 6.48 at 90% confidence with 1 failure.
6. Preconditioned with 10K write/erase cycles at 25°C
7. Preconditioned with 10K write/erase cycles at 125°C

This report applies to the following part numbers:		
EFR32BG13P733F512GM48-C	EFR32FG13P233F512GM48-C	EFR32MG13P733F512GM48-C
EFR32BG13P732F512GM48-C	EFR32FG13P232F512GM48-C	EFR32MG13P732F512GM48-C
EFR32BG13P632F512GM48-C	EFR32FG13P231F512GM48-C	EFR32MG13P632F512GM48-C
EFR32BG13P532F512GM48-C		

The information contained in this document is PROPRIETARY to Silicon Labs and shall not be reproduced or used in part or whole without Silicon Labs' written consent. The document is uncontrolled if printed or electronically saved.

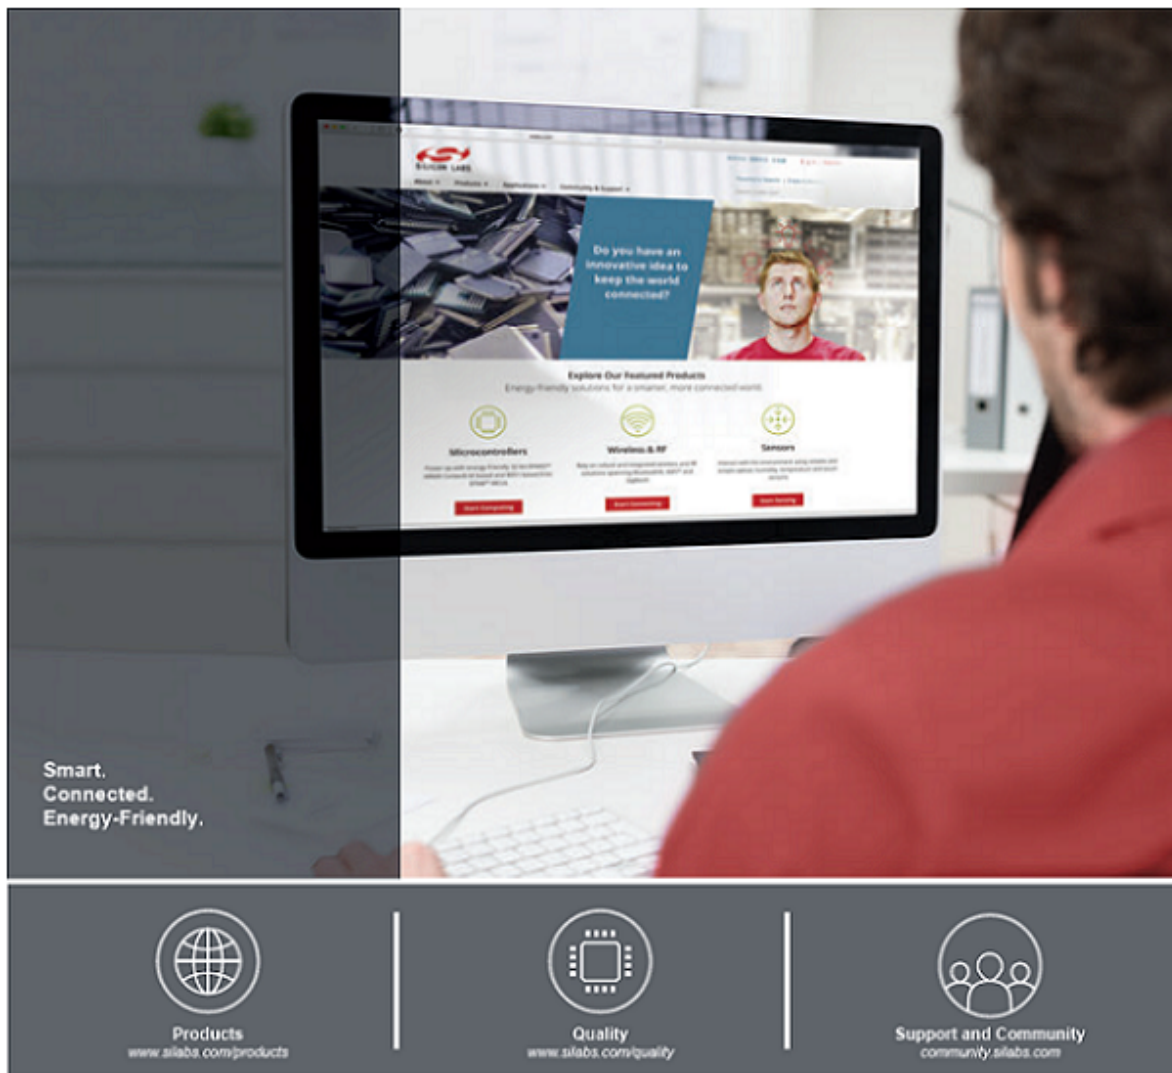

Disclaimer

Silicon Labs intends to provide customers with the latest, accurate, and in-depth documentation of all peripherals and modules available for system and software implementers using or intending to use the Silicon Labs products. Characterization data, available modules and peripherals, memory sizes and memory addresses refer to each specific device, and "Typical" parameters provided can and do vary in different applications. Application examples described herein are for illustrative purposes only. Silicon Labs reserves the right to make changes without further notice and limitation to product information, specifications, and descriptions herein, and does not give warranties as to the accuracy or completeness of the included information. Silicon Labs shall have no liability for the consequences of use of the information supplied herein. This document does not imply or express copyright licenses granted hereunder to design or fabricate any integrated circuits. The products are not designed or authorized to be used within any Life Support System without the specific written consent of Silicon Labs. A "Life Support System" is any product or system intended to support or sustain life and/or health, which, if it fails, can be reasonably expected to result in significant personal injury or death. Silicon Labs products are not designed or authorized for military applications. Silicon Labs products shall under no circumstances be used in weapons of mass destruction including (but not limited to) nuclear, biological or chemical weapons, or missiles capable of delivering such weapons.

Trademark Information

Silicon Laboratories Inc.®, Silicon Laboratories®, Silicon Labs®, SiLabs® and the Silicon Labs logo®, Bluegiga®, Bluegiga Logo®, Clockbuilder®, CMEMS®, DSPLL®, EFM®, EFM32®, EFR®, Ember®, Energy Micro, Energy Micro logo and combinations thereof, "the world's most energy friendly microcontrollers", Ember®, EZLink®, EZRadio®, EZRadioPRO®, Gecko®, ISOmodem®, Micrium®, Precision32®, ProSLIC®, Simplicity Studio®, SiPHY®, Telegesis, the Telegesis Logo®, USBXpress®, Zentri and others are trademarks or registered trademarks of Silicon Labs. ARM, CORTEX, Cortex-M3 and THUMB are trademarks or registered trademarks of ARM Holdings. Keil is a registered trademark of ARM Limited. All other products or brand names mentioned herein are trademarks of their respective holders.



Silicon Laboratories Inc.
400 West Cesar Chavez
Austin, TX 78701

<http://www.silabs.com>