


# UG595: CP2102C USB-to-UART Bridge Mini Development Kit User's Guide

The CP2102C USB-to-UART Bridge Mini Development Kit is designed to showcase the various features of the CP2102C devices.

These highly-integrated USB-to-UART bridge controllers provide a simple solution for updating RS-232 designs to USB using a minimum of components and PCB space. CP2102C devices includes a USB 2.0 full-speed function controller, USB transceiver, oscillator, and Universal Asynchronous Receiver/Transmitter (UART) in packages as small as 4 mm x 4 mm. No other external USB components are required for development. By eliminating the need for complex firmware and driver development, the CP2102C devices enable quick USB connectivity with minimal development effort.

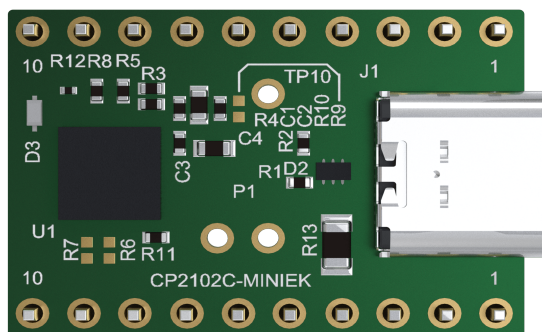

## TARGET DEVICE

- CP2102C USB-to-UART bridge (CP2102C-A01-GQFN28R)

## KIT FEATURES

- User LED
- 20-pin 2.54 mm breakout pads
- Line break support
- USB-powered

## SOFTWARE SUPPORT

- Simplicity Studio™

## ORDERING INFORMATION

- CP2102C-MINIEK

# Table of Contents

<b>1. Introduction . . . . .</b>	<b>3</b>
1.1 Kit Contents . . . . .	3
1.2 Getting Started . . . . .	4
1.3 Hardware Content . . . . .	6
1.4 Kit Hardware Layout . . . . .	7
<b>2. Specifications . . . . .</b>	<b>8</b>
2.1 Recommended Operating Conditions . . . . .	8
2.2 Current Consumption . . . . .	8
2.3 Data Formats and Baud Rates. . . . .	8
<b>3. Hardware . . . . .</b>	<b>9</b>
3.1 Block Diagram . . . . .	9
3.2 Power Supply . . . . .	10
3.3 LED . . . . .	10
3.4 Connectors . . . . .	11
3.4.1 Breakout Pads . . . . .	12
<b>4. Schematics, Assembly Drawings, and BOM . . . . .</b>	<b>13</b>
<b>5. Kit Revision History . . . . .</b>	<b>14</b>
5.1 Revision History . . . . .	14
<b>6. Board Revision History . . . . .</b>	<b>15</b>
6.1 Revision History . . . . .	15
<b>7. Document Revision History . . . . .</b>	<b>16</b>

## 1. Introduction

The CP2102C USB-to-UART Bridge Mini Development Kit is a compact and versatile board designed for developers and engineers looking to integrate USB connectivity into embedded systems. This development kit provides an easy-to-use solution for converting USB signals into UART serial data, making it ideal for applications that require reliable USB-to-serial communication.

The CP2102C USB-to-UART Bridge Mini Development Kit is optimized for ease of use, offering a plug-and-play experience with built-in USB and UART connectivity without the need for additional external components. It supports full-speed USB 2.0 data transfers and includes advanced features such as programmable baud rates, low-power operation, and integrated voltage regulators, enabling flexible and power-efficient designs.

With its compact form factor and user-friendly design, the CP2102C USB-to-UART Bridge Mini Development Kit board is perfect for prototyping, testing, and debugging applications that require reliable USB-to-serial communication, making it a valuable tool for developing a wide range of devices, from microcontroller-based projects to sensor networks and IoT systems.

### 1.1 Kit Contents

The following item is included in the box:

- 1x CP2102C USB-to-UART Bridge Mini Development Board (BRD8101A)

## 1.2 Getting Started

### Step 1: Set Up Your Kit.

- Provide power to the board by connecting the USB Type-C connector to the PC using a USB Type-C cable (not provided as part of the kit). When a connection has been established successfully, the LED (D3) lights up (except when the board is connected to the external power supply unit on Breakout Pads or when CP2102C is in Suspend mode).

### Step 2: Device Detection.

- The CP2102C device will appear under ports in Device Manager in Windows. As a virtual COM port, the CP210x functions identically to a real COM port from the reference point of both the host application and the serial device, and it can support serial device control requests defined in the Microsoft Win32® Communications API.


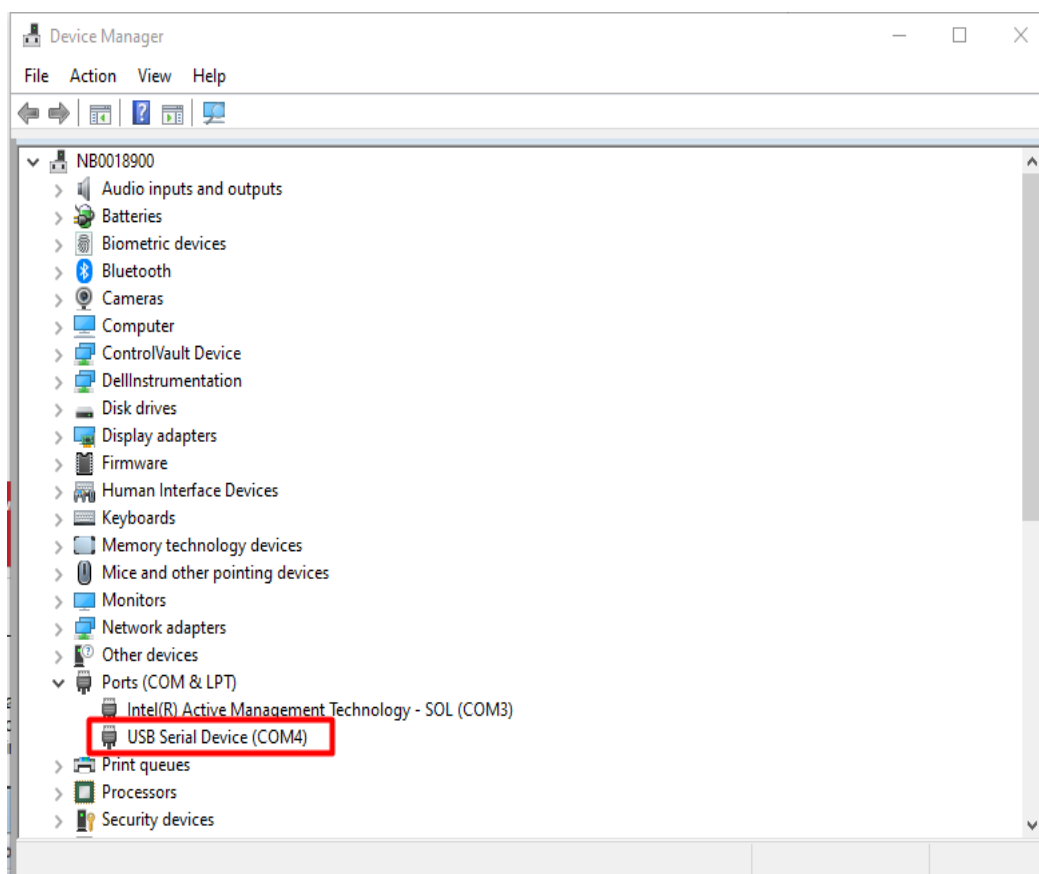


Figure 1.1. CP2102C USB-to-UART Bridge Mini Development Kit in Device Manager

### Step 3: Loop-Back Test.


- Short the CP210x CTS and GND pins on header P2.
- Short the CP210x RXD and TXD pins on header P2.

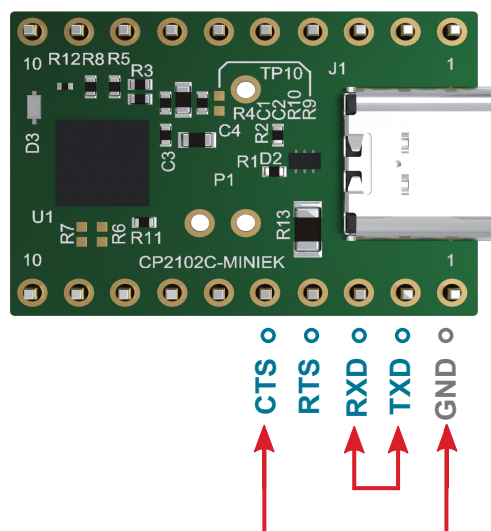

**Figure 1.2. CP2102C USB-to-UART Bridge Mini Development Kit Connectors**

#### Step 4: Transmit and Receive Data.

- In Windows, open a serial terminal program (downloaded separately, RealTerm pictured) to verify the CP2102C UART functionality.
- Set the baud rate and select the COM port from Device Manager.
- Type in the transmit area. The characters should echo back after looping through the CP2102C TXD and RXD pins.

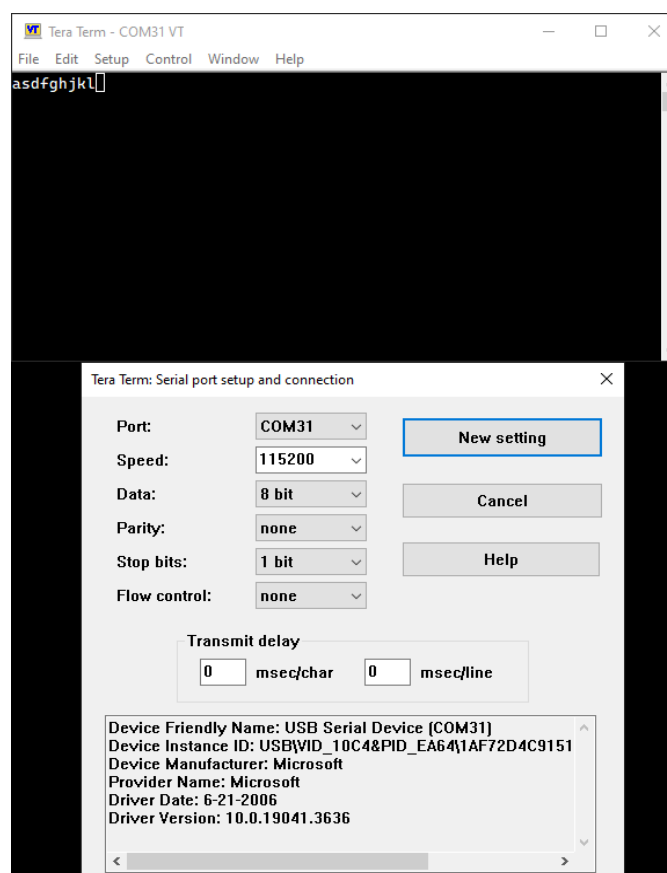

**Figure 1.3. CP2102C USB-to-UART Bridge Mini Development Kit in Terminal Program**

Detailed instructions for how to get started with your new CP2102C USB-to-UART Bridge Mini Development Kit can be found on the Silicon Labs web page: <https://www.silabs.com/dev-tools>

### 1.3 Hardware Content

The following key hardware elements are included on the CP2102C USB-to-UART Bridge Mini Development Kit:

- Full-speed USB 2.0 support
- Configurable baud rates and data formats
- Onboard status LED
- Breakout pads
- Line break support

CP2102C USB-to-UART Bridge Mini Development Kit layout is shown below.



## 2. Specifications

### 2.1 Recommended Operating Conditions

**Table 2.1. Recommended Operating Conditions**

Parameter	Symbol	Min	Typ	Max	Unit
Operating Supply Voltage on VDD	V <sub>DD</sub>	3.0	—	3.6	V
Operating Supply Voltage on VREGIN	V <sub>VREGIN</sub>	3.0	—	5.25	V

### 2.2 Current Consumption

**Table 2.2. Current Consumption**

Parameter	Symbol	Condition	Typ	Unit
Normal Operation	I <sub>DD</sub>	115200 baud transmitting continuous bidirectional data	9.5	mA
		3 Mbaud transmitting continuous bidirectional data	13.7	mA
USB Suspend	I <sub>DD</sub>	—	195	μA
Held in Reset	I <sub>DD</sub>	—	1.3	mA
USB Pull-up	I <sub>PU</sub>	—	200	μA

### 2.3 Data Formats and Baud Rates

**Table 2.3. Data Formats and Baud Rates**

Parameter	Available Values
Data Bits	5, 6, 7, and 8
Stop Bits	1, 1.5 <sup>1</sup> , and 2
Parity Types	none, even, odd, mark, space
Baud Rates	300, 600, 1200, 1800, 2400, 4000, 4800, 7200, 9600, 14400, 16000, 19200, 28800, 38400, 51200, 56000, 57600, 64000, 76800, 115200, 128000, 153600, 230400, 250000, 256000, 460800, 500000, 576000, 921600, 1000000, 1200000, 1500000, 2000000, 3000000
<b>Note:</b> 1. The stop bit is active for two bit times (when the data length is 6, 7, or 8 bits) or 1.5 bit times (when the data length is 5 bits).	



### 3. Hardware

The core of the CP2102C USB-to-UART Bridge Mini Development Kit is the CP2102C USB-to-UART bridge. Refer to section [1.4 Kit Hardware Layout](#) for placement and layout of the hardware components.

#### 3.1 Block Diagram

An overview of the CP2102C USB-to-UART Bridge Mini Development Kit is illustrated in the figure below.

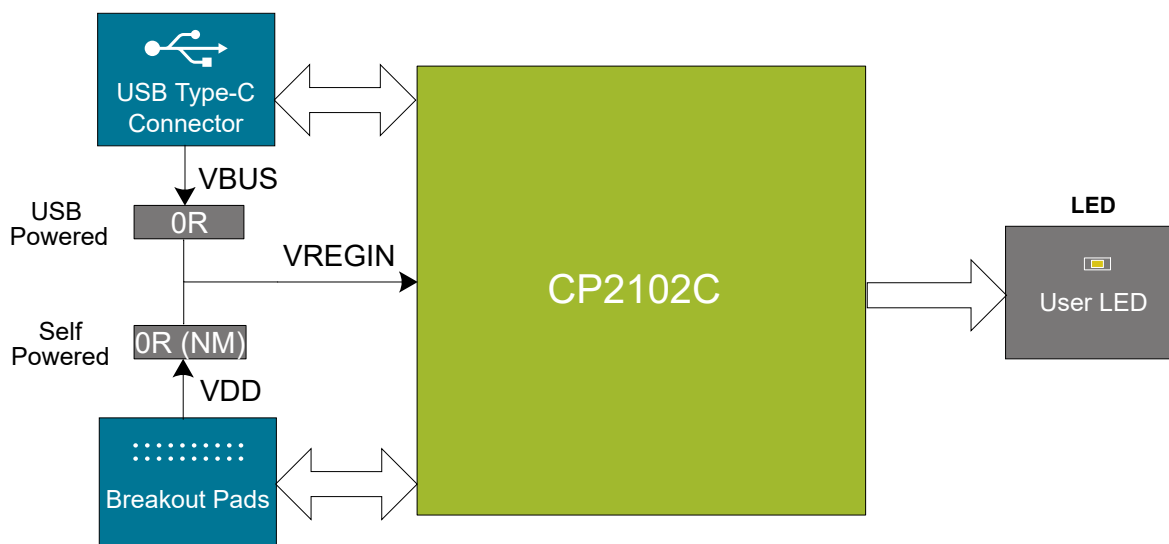



Figure 3.1. Kit Block Diagram

### 3.2 Power Supply

In CP2102C USB-to-UART Bridge Mini Development Kit, there are two primary power supply options for operation:.

- USB-powered
- Self-powered

The power topology of the kit is illustrated in the figure below.

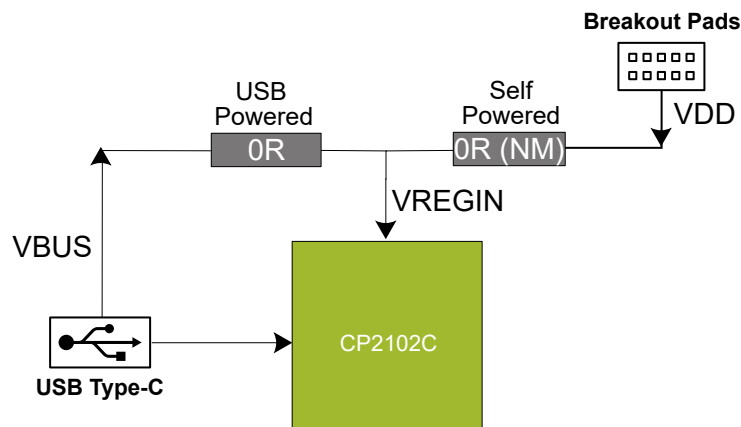

**Figure 3.2. CP2102C USB-to-UART Bridge Mini Development Kit Power Topology**


In USB-powered mode, the kit draws power directly from the USB port when it is connected to a computer or any other USB power source.

In self-powered mode, the kit is powered by an external power source via breakout pads.

**Note:** By default, this device operates in USB-powered mode. To switch to self-powered mode, remove R10 and solder R9.

### 3.3 LED

The kit features a green LED marked D3 controlled by the pin on the CP2102C. D3 is connected to pin SUSPENDb which is driven low when the device enters the USB suspend state.

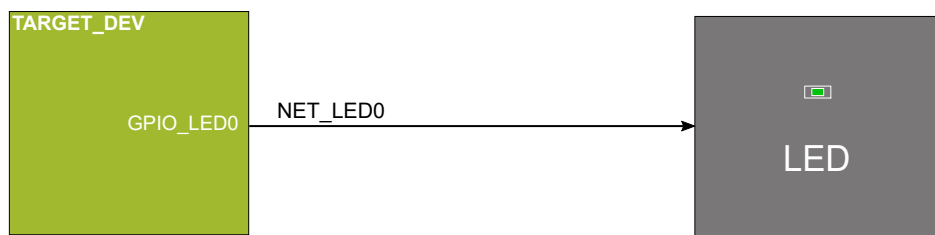

**Figure 3.3. LED**

### 3.4 Connectors

The CP2102C USB-to-UART Bridge Mini Development Kit features a USB Type-C connector and 20 breakout pads. The connectors are placed on the top side of the board, and their placement and pinout are shown in the figure below. For additional information on the connectors, see the following sub chapter.

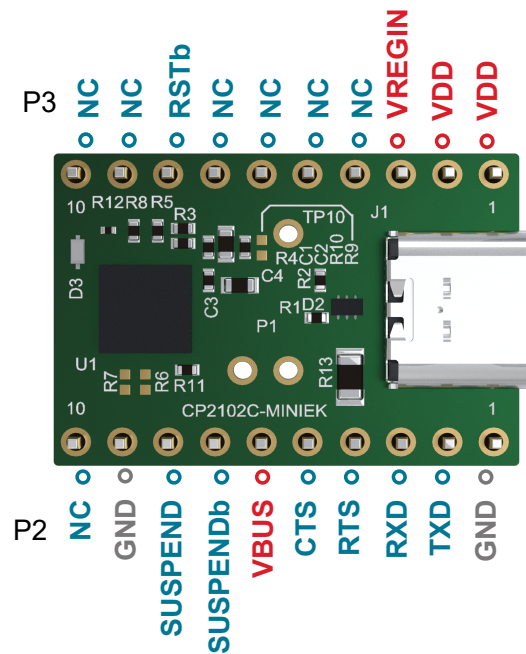


Figure 3.4. CP2102C USB-to-UART Bridge Mini Development Kit Connectors

### 3.4.1 Breakout Pads

Twenty breakout pads are provided and allow connection of external peripherals. There are 10 pads on the bottom side of the board, and 10 pads on the top. These have a standard 2.54 mm pitch, and pin headers can be soldered in if required. The breakout pads contain a number of I/O pins that can be used with most of the CP2102C USB-to-UART bridge's features. Additionally, the VREGIN (5V Regulator Input), VDD (Supply Power Input/ 5V Regulator Output), and VBUS power rails are also exposed on the pads.

The pin-routing on the CP2102C USB-to-UART Bridge Mini Development Kit is very flexible, so most peripherals can be routed to any pin. The table below shows the pin connections of the breakout pads with description.

**Table 3.1. Bottom Row (P2) Pinout**

Pin	CP2102C I/O Pin	Description
1	GND	Ground
2	TXD	Transmit Data
3	RXD	Receive Data
4	RTS	Request to Send
5	CTS	Clear to Send
6	VBUS	USB VBUS
7	SUSPENDb	Driven low when device enters USB suspend state
8	SUSPEND	Driven high when device enters USB suspend state
9	GND	Ground
10	NC	—

**Table 3.2. Top Row (P3) Pinout**

Pin	CP2102C I/O Pin	Description
1	VDD	3.3 V Regulator Output
2	VDD	3.3 V Regulator Output
3	VREGIN	5 V Regulator Input
4	NC	—
5	NC	—
6	NC	—
7	NC	—
8	RSTb	Active-low Reset
9	NC	—
10	NC	—

## 4. Schematics, Assembly Drawings, and BOM

Schematics, assembly drawings, and Bill of Materials (BOM) are available through Simplicity Studio when the kit documentation package has been installed. They are also available from the kit page on the Silicon Labs website: [silabs.com](https://silabs.com).

## 5. Kit Revision History

### 5.1 Revision History

The kit revision can be found printed on the box label of the kit, as outlined in the figure below. The kit revision history is summarized in the table below.



Figure 5.1. Revision Info

Table 5.1. Kit Revision History

Kit Revision	Released	Description
A01	2 December 2024	New kit introduction of CP2102C-MINIEK.

## 6. Board Revision History

### 6.1 Revision History

The board revision can be found laser printed on the board, and the board revision history is summarized in the following table.

**Table 6.1. Board Revision History**

Revision	Released	Description
A05	2 December 2024	Initial production release.

## 7. Document Revision History

### Revision 1.0

January 2025

- Initial document release.



# Simplicity Studio


One-click access to MCU and wireless tools, documentation, software, source code libraries & more. Available for Windows, Mac and Linux!



**IoT Portfolio**  
[www.silabs.com/loT](http://www.silabs.com/loT)



**SW/HW**  
[www.silabs.com/simplicity](http://www.silabs.com/simplicity)



**Quality**  
[www.silabs.com/quality](http://www.silabs.com/quality)



**Support & Community**  
[www.silabs.com/community](http://www.silabs.com/community)

## Disclaimer

Silicon Labs intends to provide customers with the latest, accurate, and in-depth documentation of all peripherals and modules available for system and software implementers using or intending to use the Silicon Labs products. Characterization data, available modules and peripherals, memory sizes and memory addresses refer to each specific device, and "Typical" parameters provided can and do vary in different applications. Application examples described herein are for illustrative purposes only. Silicon Labs reserves the right to make changes without further notice to the product information, specifications, and descriptions herein, and does not give warranties as to the accuracy or completeness of the included information. Without prior notification, Silicon Labs may update product firmware during the manufacturing process for security or reliability reasons. Such changes will not alter the specifications or the performance of the product. Silicon Labs shall have no liability for the consequences of use of the information supplied in this document. This document does not imply or expressly grant any license to design or fabricate any integrated circuits. The products are not designed or authorized to be used within any FDA Class III devices, applications for which FDA premarket approval is required or Life Support Systems without the specific written consent of Silicon Labs. A "Life Support System" is any product or system intended to support or sustain life and/or health, which, if it fails, can be reasonably expected to result in significant personal injury or death. Silicon Labs products are not designed or authorized for military applications. Silicon Labs products shall under no circumstances be used in weapons of mass destruction including (but not limited to) nuclear, biological or chemical weapons, or missiles capable of delivering such weapons. Silicon Labs disclaims all express and implied warranties and shall not be responsible or liable for any injuries or damages related to use of a Silicon Labs product in such unauthorized applications.

## Trademark Information

Silicon Laboratories Inc.<sup>®</sup>, Silicon Laboratories<sup>®</sup>, Silicon Labs<sup>®</sup>, SiLabs<sup>®</sup> and the Silicon Labs logo<sup>®</sup>, Bluegiga<sup>®</sup>, Bluegiga Logo<sup>®</sup>, EFM<sup>®</sup>, EFM32<sup>®</sup>, EFR, Ember<sup>®</sup>, Energy Micro, Energy Micro logo and combinations thereof, "the world's most energy friendly microcontrollers", Redpine Signals<sup>®</sup>, WiSeConnect, n-Link, EZLink<sup>®</sup>, EZRadio<sup>®</sup>, EZRadioPRO<sup>®</sup>, Gecko<sup>®</sup>, Gecko OS, Gecko OS Studio, Precision32<sup>®</sup>, Simplicity Studio<sup>®</sup>, Telegesis, the Telegesis Logo<sup>®</sup>, USBXpress<sup>®</sup>, Zentri, the Zentri logo and Zentri DMS, Z-Wave<sup>®</sup>, and others are trademarks or registered trademarks of Silicon Labs. ARM, CORTEX, Cortex-M3 and THUMB are trademarks or registered trademarks of ARM Holdings. Keil is a registered trademark of ARM Limited. Wi-Fi is a registered trademark of the Wi-Fi Alliance. All other products or brand names mentioned herein are trademarks of their respective holders.



**Silicon Laboratories Inc.**  
400 West Cesar Chavez  
Austin, TX 78701  
USA

**[www.silabs.com](http://www.silabs.com)**